


## Inquiry #1007 Steamed Beech Class I

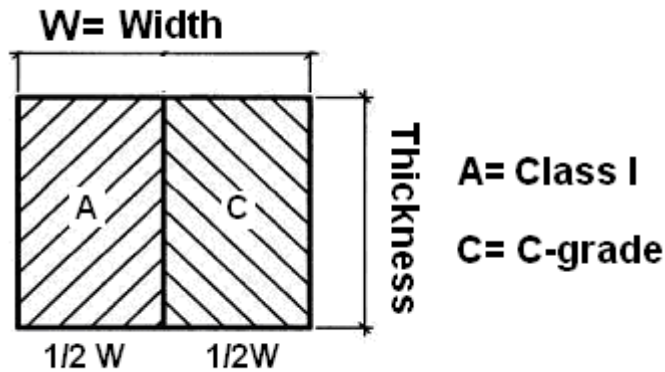

Commodity : Beech Strips for door **stiles**

Density : 650 – 800 kg/m<sup>3</sup>

Color : as sample

Tolerances : Thickness : ± 0.15 mm  
 Width : - 0/+ 0.5 mm  
 Length : - 0/+ 2 mm  
 Bow/bending : 1.5 mm/meter

Moisture : KD, MC 6 – 8 % at packing

Quality : Light steamed, pre-planned or fine ripped, must be glued from 2 pcs as drawing using Glue D3, sound knots max 3 mm allowed.

For part A (Class I) Finger jointing, dead knots, spinning over 20 mm Ø, wane, bark, cracks, pith, redwood, pinholes, Brownwood not allowed.

For part C (C-Grade): Gluing of several layers allowed, Finger jointing allowed, no minimum wood length for finger jointing required, dead knots not allowed but 3-4 small black knots of maximum 2mm diameter allowed, sound knots any size allowed, putty fill not required, if you can keep the tolerances fine ripping is allowed.

### Size and Quantities

Pos	Article No.	Dimensions in mm			Qty
		T	W	L	M3
1	FF35327010	33.1	35	1,997	41
2	FF35327020	33.1	35	2,122	132
3	FF35327030	33.1	35	2,372	12
4	FF35327045	33.1	35	2,912	5
5	FF35887010	38.1	35	1,997	5
6	FF35387020	38.1	35	2,122	22
7	FF35387030	38.1	35	2,372	3
8	FF35387045	38.1	35	2,912	1
9	FF48387030	38.1	48	2,372	15
10	FF48387045	38.1	48	2,912	10
11	FF48457030	45.1	48	2,372	49

Pos	Article No.	Dimensions in mm			Qty
		T	W	L	M3
12	FF48457045	45.1	48	2,912	2
13	FF48507030	50.1	48	2,372	17
14	FF48507045	50.1	48	2,912	0
15	FF48557010	55.1	48	1,997	17
16	FF48557020	55.1	48	2,122	50
17	FF48557030	55.1	48	2,372	9
18	FF48557045	55.1	48	2,912	2
19	FF48607010	60.1	48	1,997	41
20	FF48607020	60.1	48	2,122	95
21	FF48607030	60.1	48	2,372	13
22	FF48607045	60.1	48	2,912	7