


Inquiry #1008 Steamed Beech Class I

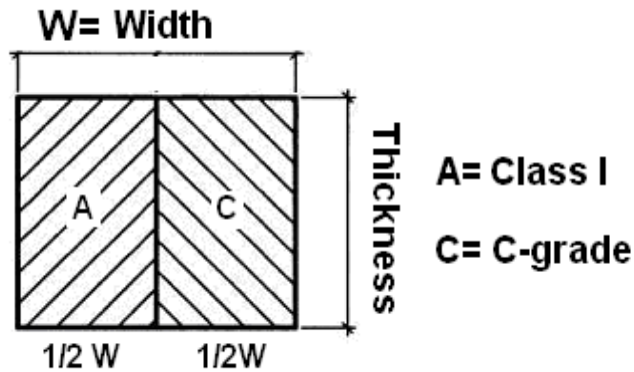

Commodity : Beech Strips for door **Top Rail**

Density : 650 – 800 kg/m³

Color : as sample

Tolerances : Thickness : ± 0.15 mm
 Width : - 0/+ 0.5 mm
 Length : - 0/+ 2 mm
 Bow/bending : 1.5 mm/meter

Moisture : KD, MC 6 – 8 % at packing

Quality : Light steamed , pre-planned or fine ripped , must be glued from 2 pcs as drawing using Glue D3 , sound knots max 3 mm allowed, finger jointing allowed glue D3 min. length 160mm same coloring.

For Part A (Class I), dead knots, spinning over 20 mm Ø, wane, bark, cracks, pith, redwood, pinholes, Brownwood not allowed

For part C (C-Grade): Gluing of several layers allowed, Finger jointing allowed, no minimum wood length for finger jointing required, dead knots not allowed but 3-4 small black knots of maximum 2mm diameter allowed, sound knots any size allowed, putty fill not required, if you can keep the tolerances fine ripping is allowed.

Size and Quantities :

Pos	Article No	Dimensions in mm			Qty
		T	W	L	
1	FF53327070	33.1	53	789	28
2	FF53327080	33.1	53	923	27
3	FF53327095	33.1	53	1,173	10
4	FF53327097	33.1	53	1,338	2
5	FF53387080	38.1	53	923	2
6	FF53387095	38.1	53	1,173	2
7	FF53387097	38.1	53	1,338	2
8	FF53327051	33.1	53	512	2

Pos	Article No	Dimensions in mm			Qty
		T	W	L	
9	FF53327099	33.1	38	789	10
10	FF53327099	38.1	38	923	12
11	FF48387050	38.1	38	1,173	3
12	FF48457075	45.1	48	1,338	7
13	FF48507075	50.1	48	923	3
14	FF48557075	55.1	48	1,173	12
15	FF48607075	60.1	48	1,338	25