


Inquiry #1011 Steamed Beech Class II

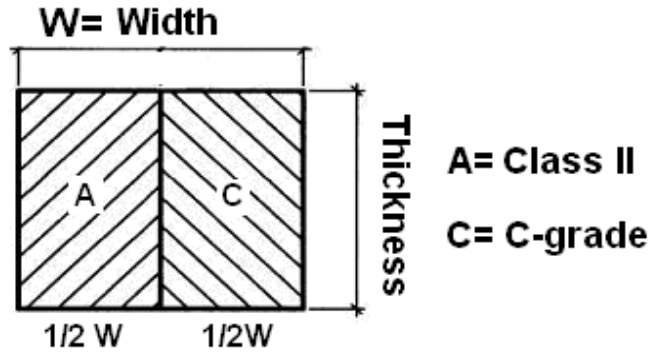

Commodity : Beech Strips for door **stiles**

Density : 650 – 800 kg/m³

Color : typical beech color

Tolerances : Thickness : ± 0.15 mm
 Width : - 0/+ 0.5 mm
 Length : - 0/+ 2 mm
 Bow/bending : 1.5 mm/meter

Moisture : KD, MC 6 – 8 % at packing

Quality : Light steamed, pre-planned or fine ripped, must be glued from 2 pcs as drawing using Glue D3 , sound knots max 15mm Ø max. 4 pcs per strip allowed , finger jointing allowed glue D3 min. length 160mm same coloring , redwood and Brownwood allowed

For Part A (Class II) dead knots , spinning over 20 mm Ø , wane , bark , Cracks , pith , pinholes not allowed

For Part C (C-Grade) Gluing of several layers allowed , Finger jointing allowed, no minimum wood length for finger jointing required, Dead knots not allowed but 3-4 small black knots of maximum 2mm diameter allowed, sound knots any size allowed , Putty fill not required, If you can keep the tolerances fine ripping is allowed.

Size and Quantities:

Pos	Article Number	Dimensions in mm			Qty
		T	W	L	M3
1	FF22604020	60.1	22	1,947	4
2	FF35324010	33.1	35	1,997	35
3	FF35324020	33.1	35	2,122	51
4	FF35324030	33.1	35	2,372	4
5	FF35324045	33.1	35	2,912	12
6	FF35384010	38.1	35	1,997	40
7	FF35384020	38.1	35	2,122	108

Pos	Article Number	Dimensions in mm			Qty
		T	W	L	M3
8	FF48384010	38.1	48	1,997	11
9	FF48384020	38.1	48	2,122	17
10	FF48454020	45.1	48	2,122	26
11	FF48504020	50.1	48	2,122	10
12	FF48554020	55.1	48	2,122	52
13	FF48604010	60.1	48	1,997	128
14	FF48604020	60.1	48	2,122	79