


## Inquiry #1012 Steamed Beech Class II

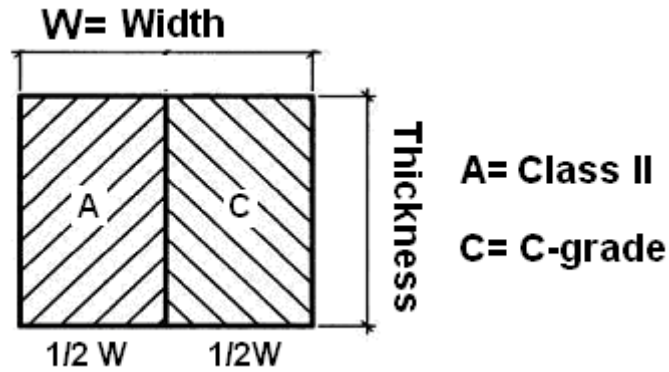

Commodity : Beech Strips for door **Top Rail**

Density : 650 – 800 kg/m<sup>3</sup>

Color : typical beech color

Tolerances : Thickness : ± 0.15 mm  
 Width : - 0/+ 0.5 mm  
 Length : -+/-0.5 mm  
 Bow/bending : 1.5 mm/meter

Moisture : KD, MC 6 – 8 % at packing

Quality : Light steamed , pre-planned , must be glued from 2 pcs as drawing using Glue D3 , sound knots max 15 mm Ø 4pcs per strip allowed , finger jointing allowed glue D3 min. length 160mm same coloring , redwood and Brownwood allowed

For Part A (Class II) dead knots, spinning over 20 mm Ø, wane, bark, Cracks, pith, pinholes not allowed

For Part C (C-Grade) Gluing of several layers allowed, finger jointing allowed, no minimum wood length for finger jointing required, dead knots not allowed but 3-4 small black knots of maximum 2mm diameter allowed, sound knots any size allowed, putty fill not required, if you can keep the tolerances fine ripping is allowed.

Size and Quantities :

Pos	Article Number	Dimensions in mm			Qty
		T	W	L	
1	FF35324080	33.1	35	923	7
2	FF35384070	38.1	35	798	9
3	FF35384080	38.1	35	923	23
4	FF48384065	38.1	48	772	2
5	FF48384075	38.1	48	897	5
6	FF53324051	33.1	53	512	12
7	FF53324074	33.1	53	888	21
8	FF53324095	33.1	53	1,173	28
9	FF53384051	38.1	53	1,173	32

Pos	Article Number	Dimensions in mm			Qty
		T	W	L	
10	FF48454065	45.1	48	772	5
11	FF48454075	45.1	48	897	20
12	FF48504065	50.1	48	772	1
13	FF48504075	50.1	48	897	9
14	FF48554065	55.1	48	772	8
15	FF48554075	55.1	48	897	41
16	FF48604065	60.1	48	772	37
17	FF48604075	60.1	48	897	86